


DIAMOND C-30 Series

Low Power CO₂ OEM Lasers for Marking and Engraving Applications

The Coherent C-30 CO₂ laser provides 30 Watts of power with best-in-class reliability and package size, making it the OEM laser of choice for high performance laser marking and engraving systems. This production-ready, easy-to-integrate laser system enables high quality laser marking with low maintenance and operating costs. The C-30 is ideal for laser processing of many materials, including paper, plastics, wood, rubber, leather, cloth and more.

The C-30 is part of the Coherent C-Series family of products which offer a full range of power levels – from 20W to 70W. Based on a sealed waveguide and integrated RF power supply design, the C-30 boasts outstanding production-proven reliability (lifetime >50,000 hours), while delivering superior beam quality and power stability in a compact, flexible and integrated package. The modular platform design provides cost-effective optimization of operating wavelength (from 9.3 to 10.6 μm) and cooling configuration (air/liquid), enabling rapid adaptability to changing applications and market needs.

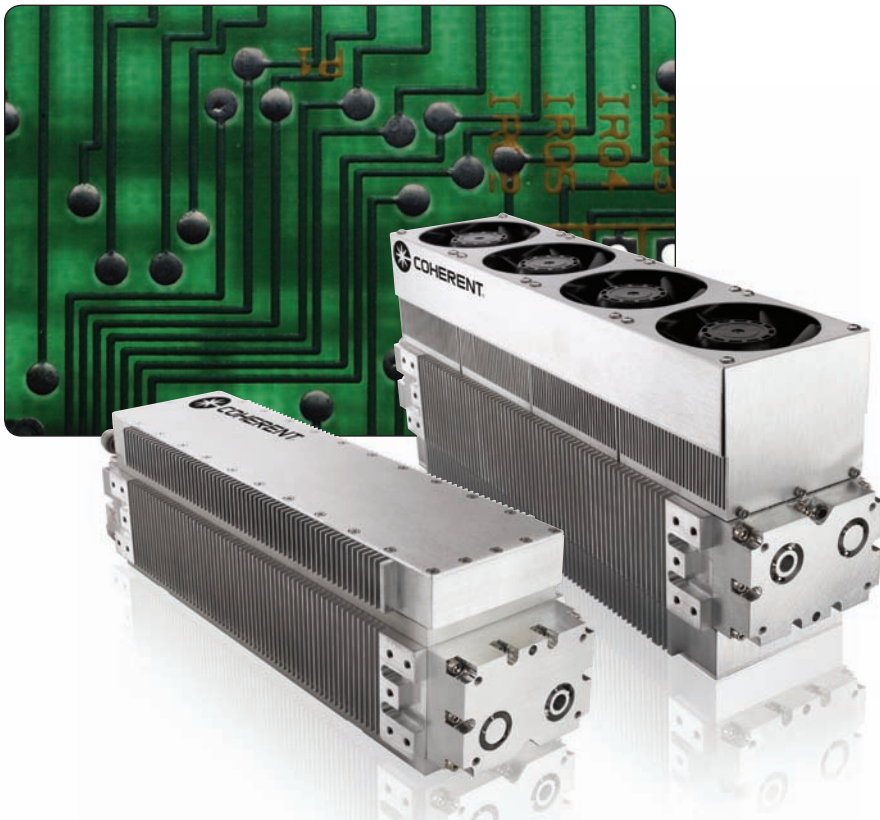

Superior Reliability & Performance

DIAMOND C-30 Series Features:

- Superior beam quality, power stability and rugged reliability
- Industry leading compact size with integrated RF power supply
- High performance at multiple wavelengths - 9.3 μm , 10.2 μm and 10.6 μm
- Wide power range with constant wave (CW) or pulse width modulation (PWM) control
- Air and liquid cooled configurations available
- High quality laser processing on a wide range of materials

DIAMOND C-30 Series Applications:

- Marking
- Engraving
- Cutting

DIAMOND C-30 Series

Low Power CO₂ OEM Lasers for Marking and Engraving Applications

System Specifications ¹	C-30A (9.3 μm)	C-30A (10.2 μm)	C-30A	C-30L (9.3 μm)	C-30L
Wavelength (μm)	9.24 to 9.35	10.11 to 10.31	10.55 to 10.63	9.24 to 9.35	10.55 to 10.63
Optical Output Power ¹ (W)	17	30	30	17	30
Power Stability ² (%)	±5				
Mode Quality (M ²)	<1.2				
Beam Size (mm)	1.8 ±0.2				
Beam Divergence (mrad, full angle)	7.5 ±0.5				
Polarization	>100 to 1 (fixed linear, parallel to width dimension)				
Operating Frequency and Duty Cycle	0 to 25 kHz, 0 to 100% DC				

Configuration and Facility Requirements

Weight	6.6 kg (14.5 lbs.)	6.2 kg (13.6 lbs.)
Dimensions (L x W x H)	357 x 92.5 x 154.5 mm (14.1 x 3.64 x 6.08 in.)	393 x 92.5 x 104.1 mm (15.48 x 3.64 x 4.1 in.) ³
Input Power ⁴	48 VDC, 11.5A	
Cooling	Air	Liquid
Heat Dissipation (W)	<575	
Maximum Case Temperature	<60°C (140°F)	
Operating Environment		
Temperature	5 to 40°C (41 to 113°F)	
Altitude	<2000 m (6500 ft.)	
Humidity	Non-condensing	
Shipping/Storage Environment	-10 to 60°C (14 to 140°F), non-condensing	
Coolant	Distilled water with 25 to 35% Dow Frost*	
Coolant Flow Rate	>3.8 lpm (1.0 gpm)	
Maximum Coolant Pressure	6.9 bar (100 psig)	
Max. Pressure Differential (at 1.0 gpm)	1.5 bar (22 psig)	
Coolant Temperature	15 to 30°C (59 to 86°F)	

¹ Power measured at 25°C and derated by 1%/C for higher laser head temperatures.

² Power stability based on $\pm(P_{max} - P_{min}) / (2 * P_{max})$ average power measurement at constant duty cycle after 10-minute warm-up at operating condition.


³ The overall height dimension is taller for the Dual Chillplate version of this item.

⁴ Optional fans add 1A.

* Dow Frost is a trademark of the Dow Chemical Company.

Mechanical Specifications

C-30L Laser Head

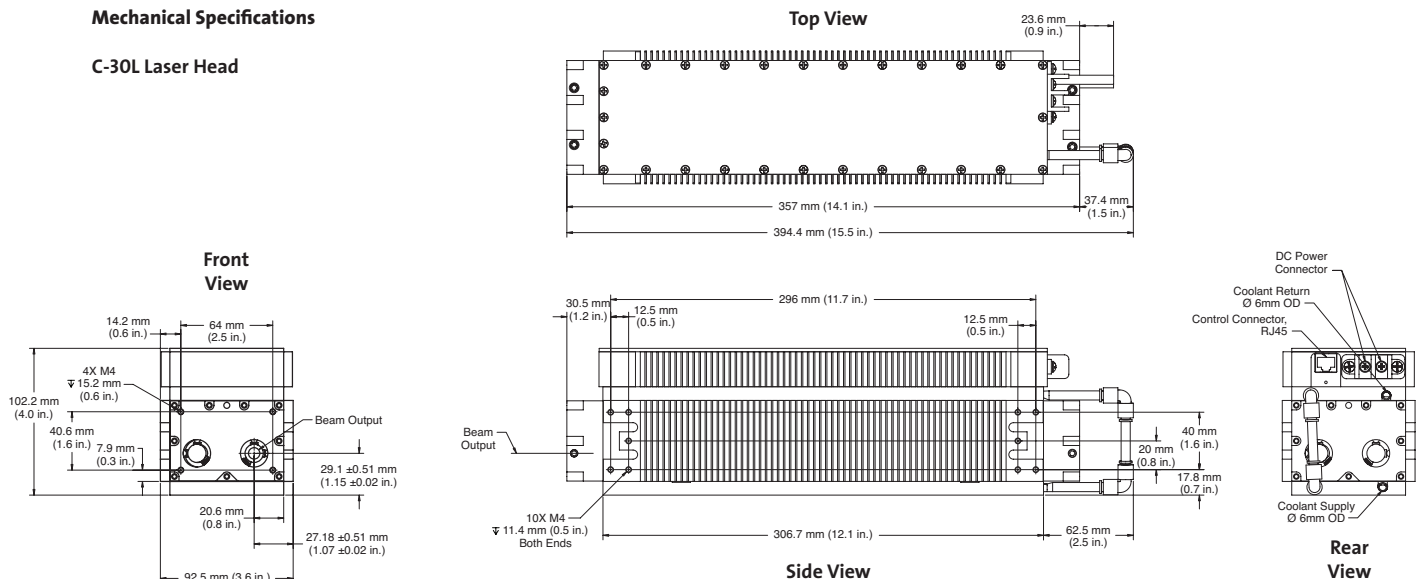


DIAMOND C-30 Series

Low Power CO₂ OEM Lasers for Marking and Engraving Applications

Mechanical Specifications

C-30A Laser Head

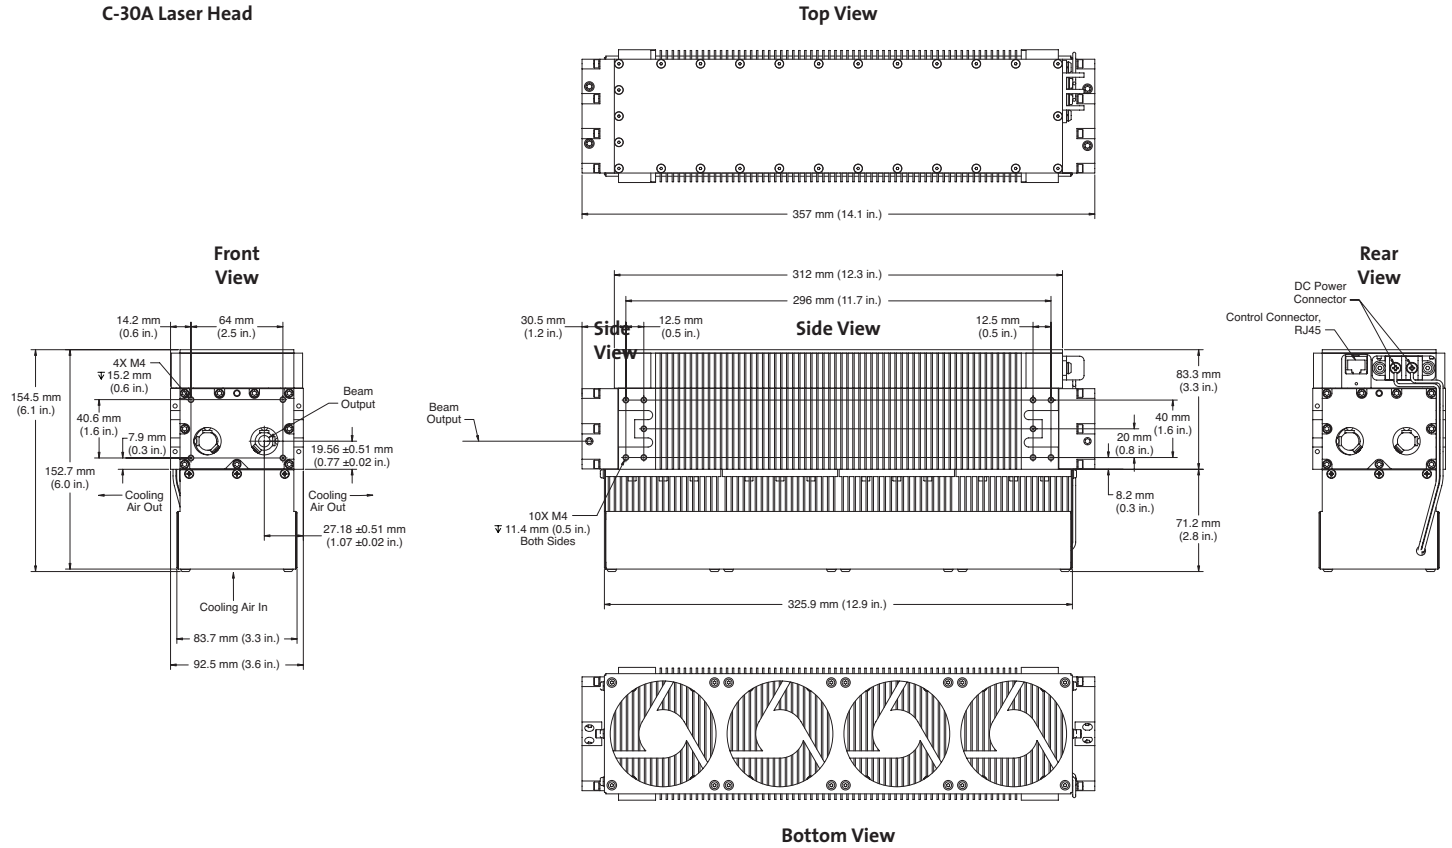

www.Coherent.com

Coherent, Inc.,
 5100 Patrick Henry Drive
 Santa Clara, CA 95054
 phone (800) 527-3786
 (408) 764-4983
 fax (408) 764-4646
 e-mail tech.sales@Coherent.com

Benelux +31 (30) 280 6060
 China +86 (10) 8215 3600
 France +33 (0)1 8038 1000
 Germany/Austria/
 Switzerland +49 (6071) 968 333
 Italy +39 (02) 31 03 951
 Japan +81 (3) 5635 8700
 Korea +82 (2) 460 7900
 Taiwan +886 (3) 505 2900
 UK/Ireland +44 (1353) 658 833

Printed in the U.S.A. MC-031-14-oM1014
 Copyright ©2014 Coherent, Inc.



Coherent, Inc. guarantees that the output power of the C-30 Series will exceed the rated power for a period of 24 months, independent of the actual operating time. Coherent, Inc. also warrants to the original purchaser for a period of 24 months from the date of delivery that the C-30 Series is free from defects in material and workmanship. The warranty does not apply to any unit damaged by accident, abuse or operation in a manner inconsistent with the procedures and specifications outlined in the manual supplied with the laser.

The C-30 Series is a laser component that does not include all safety features as required by the FDA and the Center for Devices and Radiological Health (CDRH). It is sold solely to qualified manufacturers who in their end product will supply all interlocks and indicators, and will comply fully with CDRH regulations and/or local regulatory agencies.



Add: 51 - 53 Pho Quang Str, Ward 2, Tan Binh Dist,
 Ho Chi Minh City
 Tel +84 8 3997.4421 - Fax: +84 8 3997.4423
 E-mail: info@namson.com.vn
 Website: www.namson.com.vn

BRAND
 Add: No.3B, Lance 43, Giang Vo Str, Cat Linh
 Ward, Dong Da Dist, Ha Noi City
 Tel: +84 4 37 36 83 77