


DIAMOND J-3 Series

RF-Excited OEM Industrial CO₂ Laser

Coherent DIAMOND J-3 Series are sealed, pulsed CO₂ lasers offering average power greater than 250 Watts in a fully integrated and compact package. The unique pulsing characteristics derived from its slab discharge design enable the J-3 Series laser to reach peak powers well in excess of 750W in contrast to CW modulated lasers. The J-3 Series lasers are available in 10.6 μm , 10.2 μm and 9.4 μm , and can be operated with pulsed repetition rates up to 200 kHz with fast pulse rise and fall times. This combination of wavelength selection, high peak power and fast rise and fall times, together with power on demand and excellent beam quality makes the J-Series an ideal laser for a wide range of materials processing applications.

The J-3 Series is part of the J-Series family spanning a power range from 150W to greater than 400W. The J-Series family is built on a common platform with common mechanical and electrical interfaces, common optical interfaces, common software and a common service and support strategy. All J-Series lasers offer proactive maintenance capability enabled by the integrated yet field replaceable RF power supply design and overall systems monitoring using Coherent's field proven full suite of on-board diagnostics.

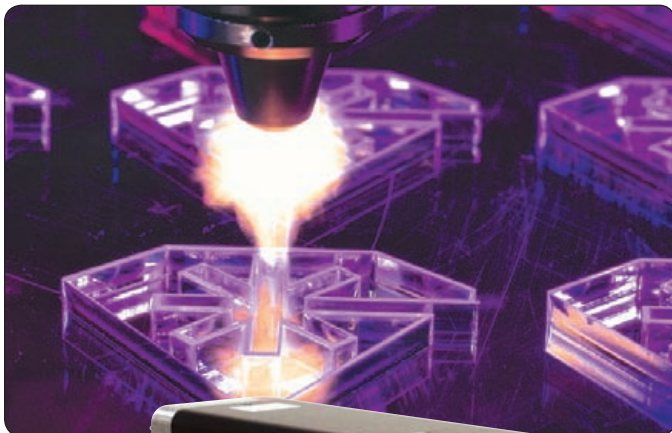

Superior Reliability & Performance

DIAMOND J-3 Series Features:

- **Wide operating power range**
- **High peak power >750W**
- **Pulse frequency from single-shot to 200 kHz**
- **Fast rise-and-fall time**
- **Outstanding beam quality**
- **Excellent power stability**
- **Low-cost OEM configuration**
- **Integrated but removable RF power supply**
- **Compact design**
- **Equipped with on-board internet-accessible diagnostics**

DIAMOND J-3 Series Applications:

- **Converting**
- **Drilling**
- **Cutting**
- **Scribing**
- **Engraving**
- **Marking**

DIAMOND J-3 Series

RF-Excited OEM Industrial CO₂ Laser

System Specifications ¹	J-3-9.4	J-3-10.2	J-3-10.6
Wavelength (μm)	9.36 ±0.05	10.25 ±0.1	10.6 ±0.4
Output Power ² (W)	≥250	≥225	≥250
Power Range ³ (W)	10 to 225	10 to 225	10 to 250
Nominal Peak Power ⁴ (W)		≥750	
Power Stability ^{2,5} (%)		±6	
Mode Quality (M ²)		<1.2	
Beam Waist Diameter ^{6,7} at 1/e ² (mm)	7.0 ±1.0	8.5 ±1.0	8.5 ±1.0
Full-Angle Beam Divergence ⁷ (mrad)	≤2.4	≤2.0	≤2.0
Polarization (parallel to baseplate)		Linear ≥100:1	
Beam Ellipticity ^{6,7}		≥0.83, ≤1.2	
Pulse Frequency (kHz)		Single-shot to 200	
RF Excitation Pulse Width Range (μsec)		2 to 1000	
Duty Cycle Limit (%)		≤60	
Fall Time ⁴ (μs)		≤60	
Weight		45 kg (99.2 lbs.)	
Dimensions (L x W x H)		1064.1 x 198.1 x 227.6 mm (41.89 x 7.8 x 8.96 in.)	
Electrical Power Requirements			
DC Input Voltage (VDC)		48 ±1.0%	
Continuous DC Current ⁸ (A)		≤90	
Peak Current (A)		≤200 for ≤6 ms	
Coolant			
Heat Load (kW)		≤4.5	
Dynamic Coolant Flow Rate (l/min.)		≥5.7	
Coolant Setpoint Temperature Range		21 to 25°C (69.8 to 77°F)	
Coolant Temperature Stability (max.)		±1.0°C (±1.8°F)	
Coolant ⁹		Anti-corrosion treated water	
Coolant Differential Pressure ¹⁰ (kPa)		103 (15 psi) at 5.7 l/min. (1.5 gpm)	
Coolant Maximum Static Pressure (kPa)		827 (120 psi)	
Environmental Conditions			
Ambient Temperature		5 to 45°C (41 to 113°F)	
Relative Humidity ¹¹ (non-condensing)(%)		≤95	
Altitude		≤2000 m (≤6500 ft.)	

¹ All specifications apply when the product is operated in accordance with the guidelines defined in the operators manual.

² Measured at 10 kHz PRF, 60% duty cycle.

³ Output stability specification may not be met at lowest power or at acoustic resonances.

⁴ Measured for a 100 μs pulse width at 1 kHz repetition frequency.

⁵ Measured as $\pm(P_{max} - P_{min})/2P_{max}$.

⁶ Measured at waist location ~1.0 m from the laser output.

⁷ Measured at 10 kHz PRF, 25% duty cycle.

⁸ At 10 kHz PRF, maximum duty cycle operation.

⁹ See manual for details.

¹⁰ This differential pressure is from system input to output and does not include the pressure drop from chiller fittings and the supply and return hose.


¹¹ Do not operate at or below dew point.

DIAMOND J-3 Series

RF-Excited OEM Industrial CO₂ Laser

Mechanical Specifications

Laser Head

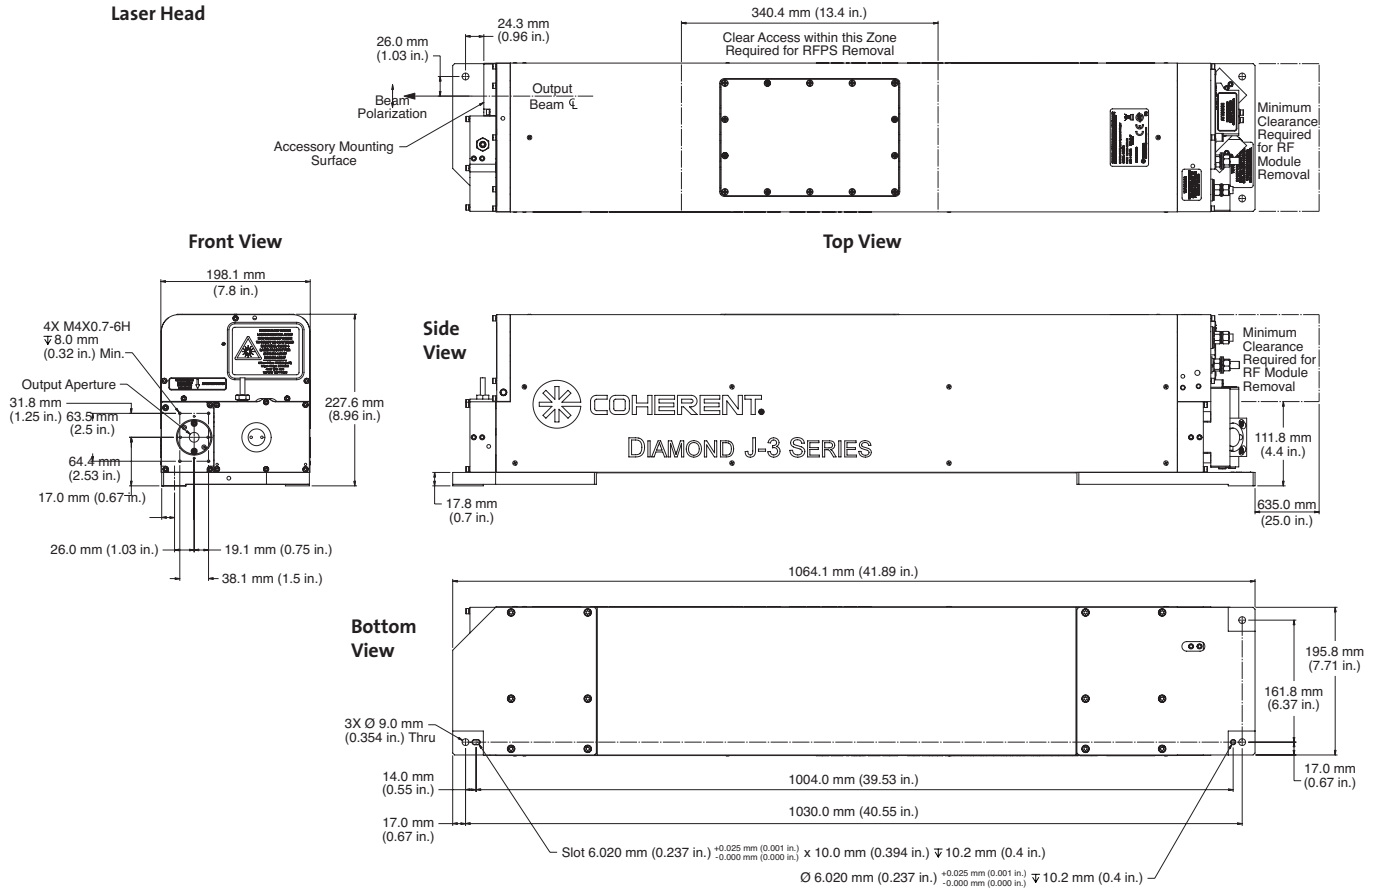

www.Coherent.com

Coherent, Inc.,
 5100 Patrick Henry Drive
 Santa Clara, CA 95054
 phone (800) 527-3786
 (408) 764-4983
 fax (408) 764-4646
 e-mail tech.sales@Coherent.com

Benelux +31 (30) 280 6060
 China +86 (10) 8215 3600
 France +33 (0)1 8038 1000
 Germany/Austria/
 Switzerland +49 (6071) 968 333
 Italy +39 (02) 31 03 951
 Japan +81 (3) 5635 8700
 Korea +82 (2) 460 7900
 Taiwan +886 (3) 505 2900
 UK/Ireland +44 (1353) 658 833

Printed in the U.S.A. MC-016-14-oMo615Rev.A
 Copyright ©2015 Coherent, Inc.

All specifications subject to change without notice. Coherent, Inc. warrants to the original purchaser for a period of two years from the date of delivery that the DIAMOND J-3 Series product is free from defects in material and workmanship. The warranty does not apply to any unit damaged by accident, abuse or operation in a manner inconsistent with the procedures and specifications outlined in the manual supplied with the laser.

The DIAMOND J-3 Series is a laser component that does not include all safety features as required by the FDA and the Center for Devices and Radiological Health (CDRH). It is sold solely to qualified manufacturers who in their end product will supply all interlocks and indicators, and will comply fully with CDRH regulations and/or local regulatory agencies.



NAMSON ENGINEERING CO., LTD **NAMSON**
 PASSION FOR INNOVATION
 ISO 9001:2008 CERTIFIED

Add: 51 - 53 Pho Quang Str, Ward 2, Tan Binh Dist,
 Ho Chi Minh City
 Tel +84 8 3997.4421 - Fax: +84 8 3997.4423
 E-mail: info@namson.com.vn
 Website: www.namson.com.vn

BRAND
 Add: No.3B, Lance 43, Giang Vo Str, Cat Linh
 Ward, Dong Da Dist, Ha Noi City
 Tel: +84 4 37 36 83 77