

# DIAMOND J-2 Series

## RF-Excited OEM Industrial CO<sub>2</sub> Laser

Coherent DIAMOND J-2 Series are sealed, pulsed CO<sub>2</sub> lasers offering average power greater than 150 Watts in a fully integrated and compact package. The unique pulsing characteristics derived from its slab discharge design enable the J-2 Series laser to reach peak powers well in excess of 450W in contrast to CW modulated lasers. The J-2 Series lasers are available in both 10.6  $\mu\text{m}$  and 9.4  $\mu\text{m}$ , and can be operated with pulsed repetition rates up to 200 kHz with fast pulse rise and fall times. This combination of wavelength selection, high peak power and fast rise and fall time times, together with power on demand and excellent beam quality makes the J-Series an ideal laser for a wide range of materials processing applications.

The J-2 Series is part of the J-Series family spanning a power range from 150W to greater than 400W. The J-Series family is built on a common platform with common mechanical and electrical interfaces, common optical interfaces, common software and a common service and support strategy. All J-Series lasers offer proactive maintenance capability enabled by the integrated yet field replaceable RF power supply design and overall systems monitoring using Coherent's field proven full suite of on-board diagnostics.



**Superior Reliability & Performance**

### DIAMOND J-2 Series Features:

- **Wide operating power range**
- **Peak power >450W**
- **Pulse frequency from single-shot to 200 kHz**
- **Fast rise-and-fall time**
- **Outstanding beam quality**
- **Excellent power stability**
- **Low-cost OEM configuration**
- **Integrated but removable RF power supply**
- **Compact design**
- **Equipped with on-board internet-accessible diagnostics**

### DIAMOND J-2 Series Applications:

- **Converting**
- **Drilling**
- **Cutting**
- **Scribing**
- **Engraving**
- **Marking**

# DIAMOND J-2 Series

RF-Excited OEM Industrial CO<sub>2</sub> Laser

## System Specifications<sup>1</sup>

	J-2-9.4	J-2-10.6
Wavelength (μm)	9.36 ±0.4	10.6 ±0.4
Output Power <sup>2</sup> (W)	≥160	≥180
Power Range <sup>3</sup> (W)	15 to 160	15 to 180
Nominal Peak Power <sup>4</sup> (W)		≥450
Power Stability <sup>2,5</sup> (%)		±6
Mode Quality (M <sup>2</sup> )		<1.2
Beam Waist Diameter <sup>6,7</sup> at 1/e <sup>2</sup> (mm)	7.0 ±1.0	8.5 ±1.0
Full-Angle Beam Divergence <sup>7</sup> (mrad)	≤2.4	≤2.0
Polarization (parallel to baseplate)		Linear ≥100:1
Beam Ellipticity <sup>6,7</sup>		≥0.83, ≤1.2
Pulse Frequency (kHz)		Single-shot to 200
RF Excitation Pulse Width Range (μsec)		2 to 1000
Duty Cycle Limit (%)		≤70
Fall Time <sup>4</sup> (μs)		≤60
Weight		35 kg (77.2 lbs.)
Dimensions (L x W x H)		830.5 x 198.1 x 227.6 mm (32.7 x 7.8 x 8.96 in.)

## Electrical Power Requirements

DC Input Voltage (VDC)	48 ±1.0%
Continuous DC Current <sup>8</sup> (A)	≤60
Peak Current (A)	≤120 for ≤6 ms

## Coolant

Heat Load (kW)	≤2.5
Dynamic Coolant Flow Rate (l/min.)	≥5.7
Coolant Setpoint Temperature Range	21 to 25°C (69.8 to 77°F)
Coolant Temperature Stability (max.)	±1.0°C (±1.8°F)
Coolant <sup>9</sup>	Anti-corrosion treated water
Coolant Differential Pressure <sup>10</sup> (kPa)	103 (15 psi) at 5.7 l/min. (1.5 gpm)
Coolant Maximum Static Pressure (kPa)	827 (120 psi)

## Environmental Conditions

Ambient Temperature	5 to 45°C (41 to 113°F)
Relative Humidity <sup>11</sup> (non-condensing)(%)	≤95
Altitude	≤2000 m (≤6500 ft.)

<sup>1</sup> All specifications apply when the product is operated in accordance with the guidelines defined in the operators manual.

<sup>2</sup> Measured at 10 kHz PRF, 60% duty cycle.

<sup>3</sup> Output stability specification may not be met at lowest power or at acoustic resonances.

<sup>4</sup> Measured for a 100 μs pulse width at 1 kHz repetition frequency.

<sup>5</sup> Measured as  $\pm(P_{max} - P_{min})/2P_{max}$ .

<sup>6</sup> Measured at waist location ~1.0 m from the laser output.

<sup>7</sup> Measured at 10 kHz PRF, 25% duty cycle.

<sup>8</sup> At 10 kHz PRF, maximum duty cycle operation.

<sup>9</sup> See manual for details.

<sup>10</sup> This differential pressure is from system input to output and does not include the pressure drop from chiller fittings and the supply and return hose.


<sup>11</sup> Do not operate at or below dew point.

# DIAMOND J-2 Series

RF-Excited OEM Industrial CO<sub>2</sub> Laser

## Mechanical Specifications

### Laser Head

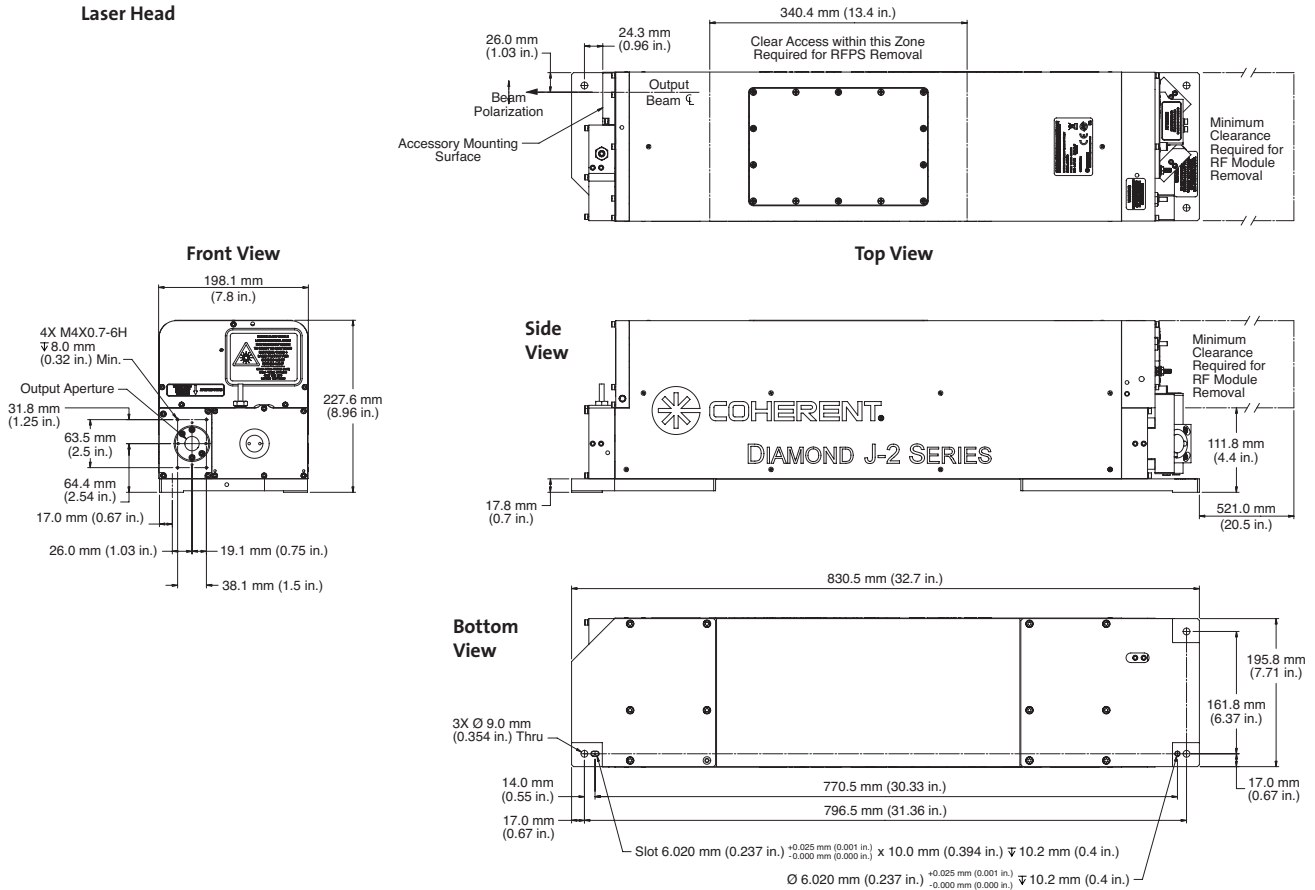

[www.Coherent.com](http://www.Coherent.com)

Coherent, Inc.,

5100 Patrick Henry Drive  
Santa Clara, CA 95054

e-mail [tech.sales@Coherent.com](mailto:tech.sales@Coherent.com)

Printed in the U.S.A. MC-015-14-0Mo615Rev.A  
Copyright ©2015 Coherent, Inc.



[www.namson.com.vn](http://www.namson.com.vn)

**NAMSON ENGINEERING CO., LTD**

Add: 51 - 53 Pho Quang Str, Ward 2, Tan Binh Dist, Ho Chi Minh City  
Tel +84 8 3997.4421 - Fax: +84 8 3997.4423  
E-mail: [info@namson.com.vn](mailto:info@namson.com.vn)

BRAND

Add: No.3B, Lance 43, Giang Vo Str, Cat Linh Ward, Dong Da Dist, Ha Noi City  
Tel: +84 4 37 36 83 77